



**UPC 05**

**Connection with no retention areas**

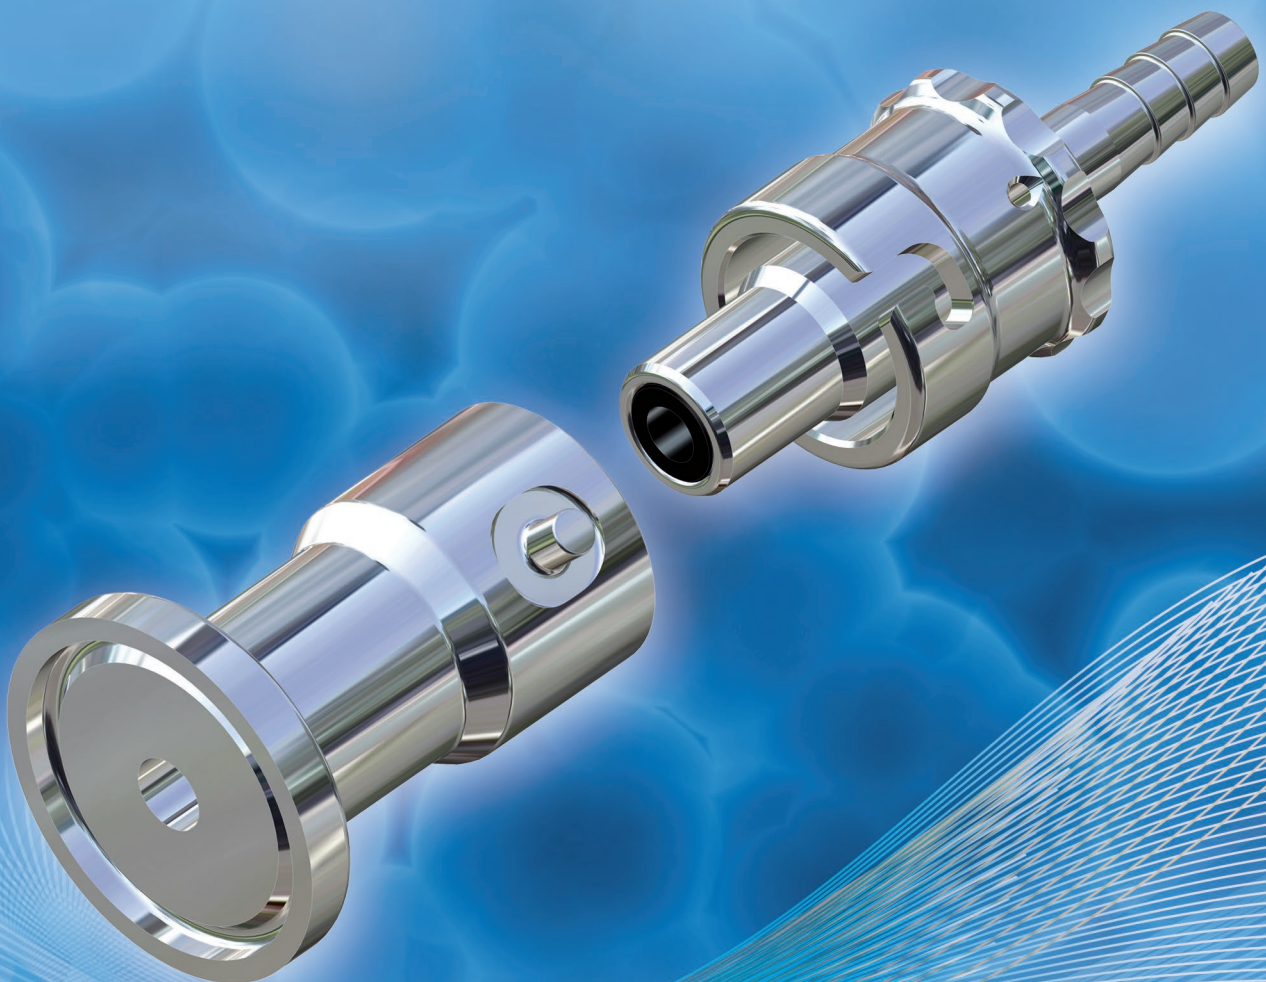

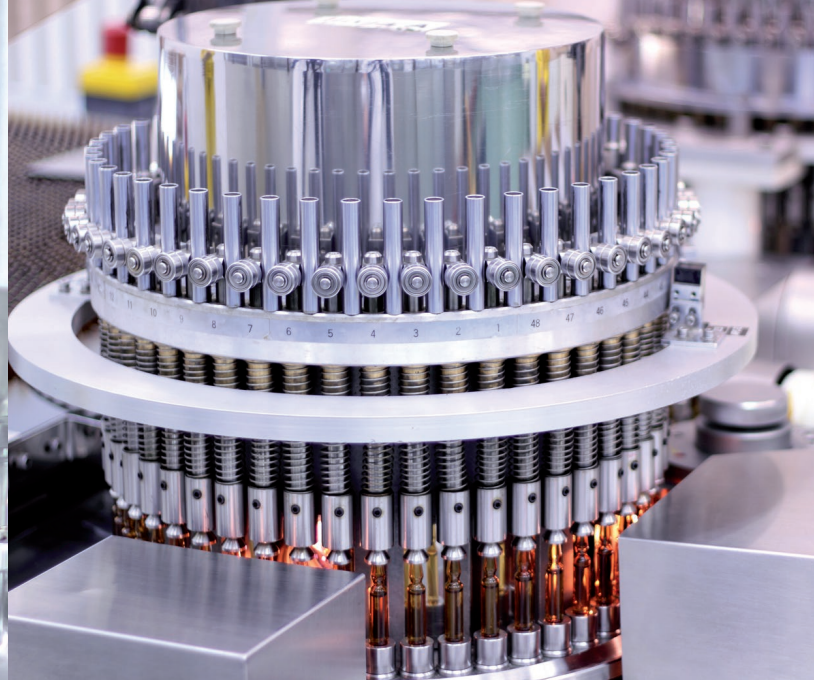

## Applications

- Loading, unloading
- Filling, draining and transfer of process fluids

## Connections with no retention areas

With its direct flow and no retention areas, the UPC coupling can be cleaned or sterilised efficiently.

## Ergonomics

Semi-automatic: coupling and uncoupling are quick and effort-free, using one hand, significantly reducing the risk of RSI for operators.

## Safety



Bayonet locking system for safe and reliable connection of your circuits.

## Certifications

The NF EN 10204 3.1 material certificate of compliance is available on request.

## Technical data

- Max. working pressure: 10 bar
- Types of seal:
  - USP class 6 silicone
 Please contact us for seals made of other materials.
- Construction:
  - AISI 316L with Ra 0.6 in the fluid jet.
- End connections:
  - socket:
    - weld-type interface or CLAMP profile
  - plug:
    - weld-type interface or hose connection
 Please contact us for other connection types.

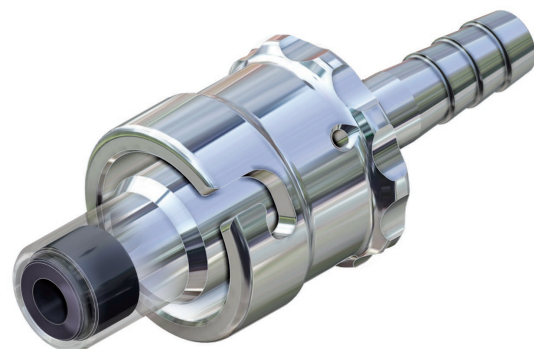

We reserve the right to modify product specification without prior notice

Stäubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. - © Stäubli, Photos : © RGTimeline - Fotolia.com, 20/03/2013

## International sales coordination

Stäubli Faverges - BP 70 - F - 74210 Faverges

Tel: +33 (0) 4 50 65 67 97 - Fax: +33 (0) 4 50 65 60 69 - E-mail: connectors.sales@staubli.com

# STÄUBLI