


CAMLOCK DIN EN 14420-7

CAMLOCK Unions aluminum

CAMLOCK aluminum male - female threaded BSP Type A

Page: 1/1

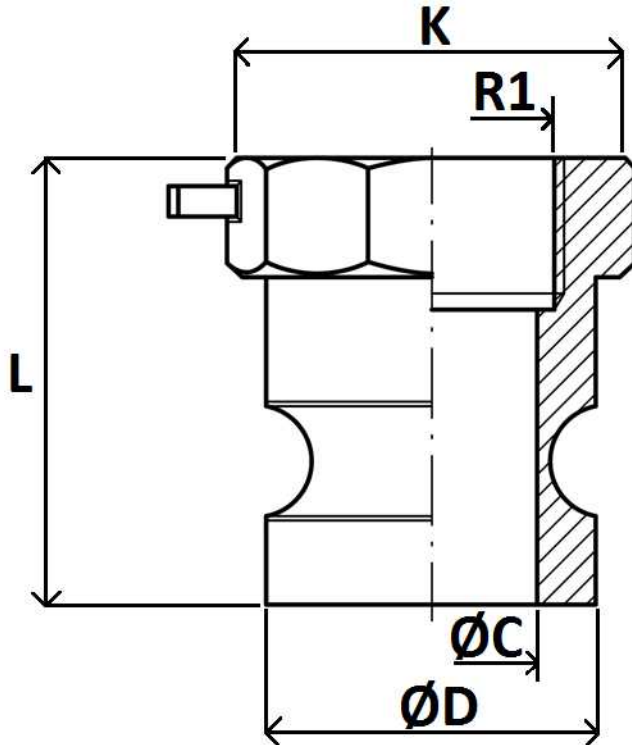

Norm: EN 14420-7 / DIN 2828

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part n°	DN	R1	L	ØC	ØD	K
050-A/AL	12	1/2"	41	14	24	25
075-A/AL	20	3/4"	41	26	32	32,3
100-A/AL	25	1"	49,5	23,5	36,5	39,3
125-A/AL	32	1" 1/4	54	28,5	49,5	48,4
150-A/AL	40	1" 1/2	56,2	37	53,2	57,5
200-A/AL	50	2"	62	47	63	66
250-A/AL	65	2" 1/2	78	55,5	75,5	82
300-A/AL	80	3"	70,5	74,5	91,5	97
400-A/AL	100	4"				

The dimensions in micro-casting parts are approximated in those elements without mechanization.