


CAMLOCK DIN EN 14420-7

CAMLOCK Unions aluminum

CAMLOCK aluminum female - male threaded BSPT Type B

Page: 1/1

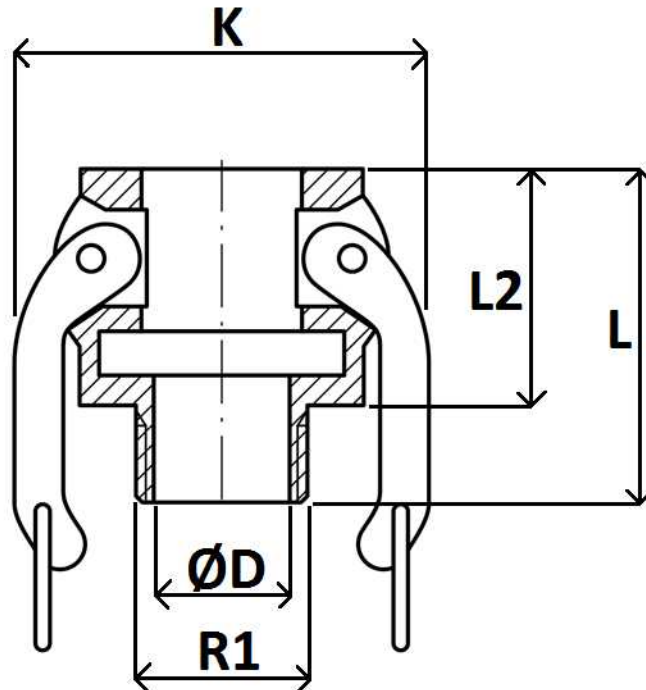

Norm: EN 14420-7 / DIN 2828

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part n°	DN	R1	L	L2	ØD	K
050-B / AL	12	1/2"				
075-B / AL	20	3/4"	53	33,3	16	61
100-B / AL	25	1"	62,5	40,5	24,5	67,7
125-B / AL	32	1" 1/4	65	44,8	34	79
150-B / AL	40	1" 1/2	70,2	47	38	87
200-B / AL	50	2"	75,2	52	50,5	96
250-B / AL	65	2" 1/2	84	55,3	61	109,5
300-B / AL	80	3"	91	57	76,8	130
400-B / AL	100	4"	93	58	99,5	155

The dimensions in micro-casting parts are approximated in those elements without mechanization.