


CAMLOCK DIN EN 14420-7

CAMLOCK Unions aluminum

CAMLOCK aluminum female - serrated hose shank Type C

Page: 1/1

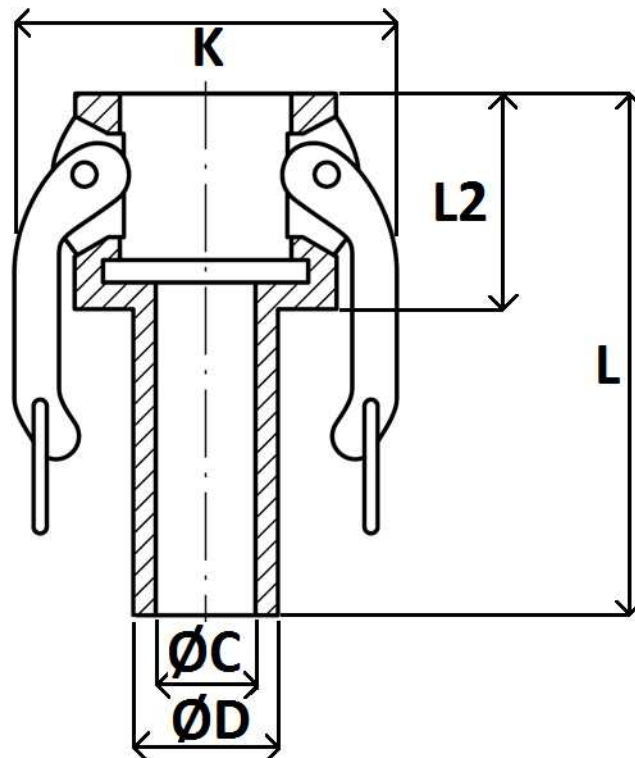

Norm: EN 14420-7 / DIN 2828

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part nº	DN	DN	L	L2	ØC	ØD	K
050-C/AL	1/2"	12	71	31	7	14,3	45
075-C/AL	3/4"	20	84	33,5	13,8	21	61
100-C/AL	1"	25	97,8	41,3	19,5	27	68
125-C/AL	1"1/4	32	103	46,5	25,5	34	78,5
150-C/AL	1"1/2	40	122	46,8	31,2	40	83
200-C/AL	2"	50	130	53,2	43	51,8	96,7
250-C/AL	2"1/2	65	152,5	57,5	56,5	65,5	109
300-C/AL	3"	80	160	62	68	77,5	130
400-C/AL	4"	100	170	62,3	91,5	103	160

The dimensions in micro-casting parts are approximated in those elements without mechanization.