


CAMLOCK DIN EN 14420-7

CAMLOCK Unions aluminum

CAMLOCK aluminum male - serrated hose shank Type E

Page: 1/1

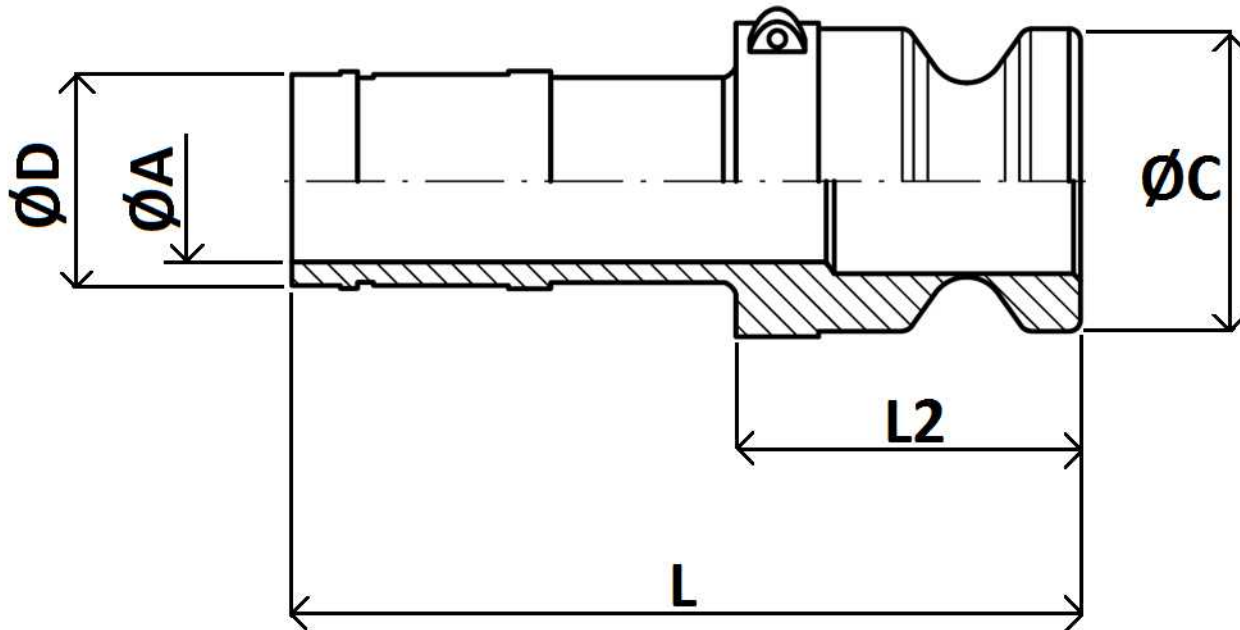

Norm: EN 14420-7 / DIN 2828

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part nº	DN	DN	L	L2	ØA	ØC	ØD
050-E/AL	1/2"	12	72,3	32,7	7,5	24,3	14,5
075-E/AL	3/4"	20	88,6	38,3	14,3	32	21
100-E/AL	1"	25	101	46,3	19	36,6	26,8
125-E/AL	1"1/4	32	105,5	50,8	25	45,6	33,6
150-E/AL	1"1/2	40	115	54,4	32,2	53	40,5
200-E/AL	2"	50	135,7	59,7	43	63	51,5
250-E/AL	2"1/2	65	160	66	56	76	66,2
300-E/AL	3"	80	168	68,5	69	91,6	78
400-E/AL	4"	100	178	69,5	93	119,4	103,6

The dimensions in micro-casting parts are approximated in those elements without mechanization.