


CAMLOCK DIN EN 14420-7

CAMLOCK Unions aluminum

CAMLOCK aluminum male - male threaded BSPT Type F

Page: 1/1

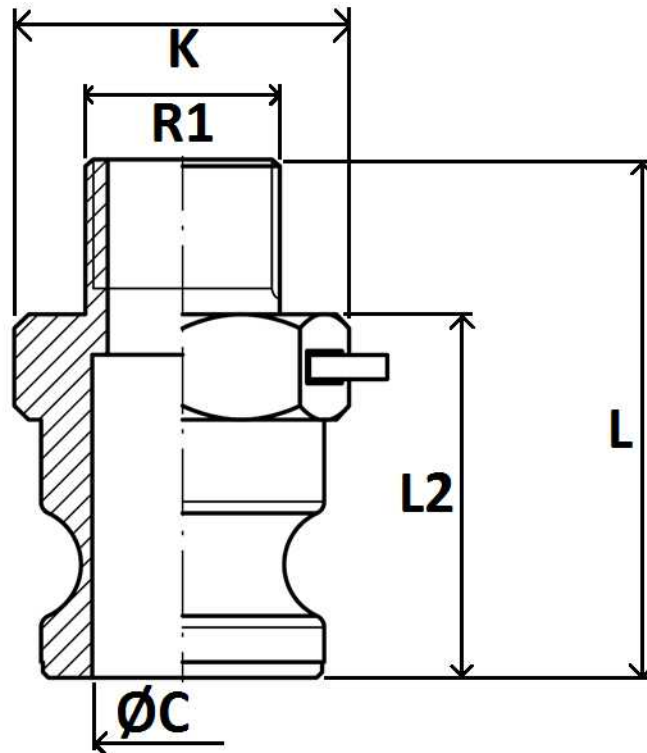

Norm: EN 14420-7 / DIN 2828

PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part n°	DN	R1	L	L2	ØC	K
050-F/AL	12	1/2"	60	40	15	25
075-F/AL	20	3/4"	61,3	42	21	32
100-F/AL	25	1"	72	51,2	24	38
125-F/AL	32	1" 1/4	80	54	29	48
150-F/AL	40	1" 1/2	78,5	56,5	37	57
200-F/AL	50	2"	87	62,5	47	66
250-F/AL	65	2" 1/2	95,7	67	57	82
300-F/AL	80	3"	98,5	68	73,5	94
400-F/AL	100	4"	111,5	75,5	101	120

The dimensions in micro-casting parts are approximated in those elements without mechanization.